



## ■ Photointerrupter Lineup

### <Transmissive type>

Output type	Package type	Outline	Mounting method	Model No. (series)	Page
Single phototransistor	Compact		PWB mounting type	GP1S396HCPOF / GP1S09xHCZ0F / GP1S19xHCZ0F	22
			Surface-mount type	GP1S396HCPSF / GP1S296HCPSF / GP1S092HCPIF / GP1S19xHCPSF	22
	Case type		PWB mounting type	GP1S5x series ▲	23
	With connector	General purpose	Snap-in	GP1S173LCS2F / GP1S273LCS1F	23
Digital output (OPIC output)	Case type		PWB mounting type	GP1A51HRJ00F	24
		Wide gap	PWB mounting type	GP1A57HRJ00F	24
	With connector	General purpose	Snap-in	GP1A173LCS5F	25

### <Reflective type>

Output type	Package type	Outline	Mounting method	Model No. (series)	Page
Single phototransistor	Leadless	Long focal distance	Surface-mount type	GP2S700HCP	25
High response speed	Compact, thin (leadless)	General purpose	Surface-mount type	GP2S60	25
			Screw mounting type/ Compact snap-in/ Inverter light countermeasures	GP2A25 series / GP2A28 series / GP2A200LCS0F / GP2A230LRS0F / GP2A230LRS0F / GP2A430LCS0F / GP2A430LCSAF / ☆GP2A431LCSAF / GP2A240LCS0F / GP2A250LCS0F / ☆GP2A451LCS0F	
OPIC output	With connector	Light modulation type, Sensitivity adjusted			26

The model marked with ▲ may not be available in the near future. Contact with SHARP for details before use.



## ■ Photointerrupters

<Transmissive type>

◆ Single Phototransistor Output


<Compact type>

(Ta = 25°C)

Model No.	Internal connection diagram	Features	Detecting and emitting gap (mm)	Slit width (mm)	Electro-optical characteristics						
					Current transfer ratio			Response time			
					CTR (%) MIN.	IF (mA)	VCE (V)	tr (μs) TYP.	Ic (mA)	RL (kΩ)	VCE (V)
GP1S092HCPIF		Wide gap, for soldering reflow, surface mount compatible, with positioning boss (4.5 × 2.6 × 2.9 [height] mm)	2.0	0.3	2.0	5	5	50	0.1	1	5
GP1S093HCZ0F		Wide gap (4.5 × 2.6 × 2.9 [height] mm)	2.0	0.3	2.0	5	5	50	0.1	1	5
GP1S094HCZ0F		Wide gap, with positioning pin, (5.5 × 2.6 × 4.8 [height] mm)	3.0	0.3	0.8	5	5	50	0.1	1	5
GP1S097HCZ0F		Wide gap, with mounting hole (4.5 × 2.6 × 4.5 [height] mm)	2.0	0.3	2.0	5	5	50	0.1	1	5
GP1S194HCZ0F		Compact, wide gap, size: 3.6 × 2.0 × 2.7 (height) mm	1.7	0.3	3.0	5	5	50	0.1	1	5
GP1S195HCPSF		Compact, wide gap, surface mount compatible, size: 3.4 × 2.0 × 2.7 (height) mm	1.5	0.3	3.0	5	5	50	0.1	1	5
GP1S196HCZ0F		Compact, low profile (3.1 × 2.0 × 2.7 [height] mm)	1.1	0.3	2.0	5	5	50	0.1	1	5
GP1S196HCPSF		Surface mount, for soldering reflow, compact, low profile (3.1 × 2.0 × 2.7 [height] mm)	1.1	0.3	2.0	5	5	50	0.1	1	5
GP1S296HCPSF		Surface mount, for soldering reflow, compact, low profile (2.5 × 1.8 × 1.9 [height] mm)	1.0	0.2	3.0	5	5	50	0.1	1	5
GP1S396HCP0F		Straight lead type, compact, low profile (2.26 × 1.4 × 1.6 [height] mm)	1.2	0.12	2.0	5	5	30	0.1	1	5
GP1S396HCPSF		Surface mount, for soldering reflow, compact, low profile (2.26 × 1.4 × 1.6 [height] mm)	1.2	0.12	2.0	5	5	30	0.1	1	5

Note: Topr: -25 to +85°C

GP1SxxxHCZxF: Sleeve package, GP1SxxxHCPxF: Taped package

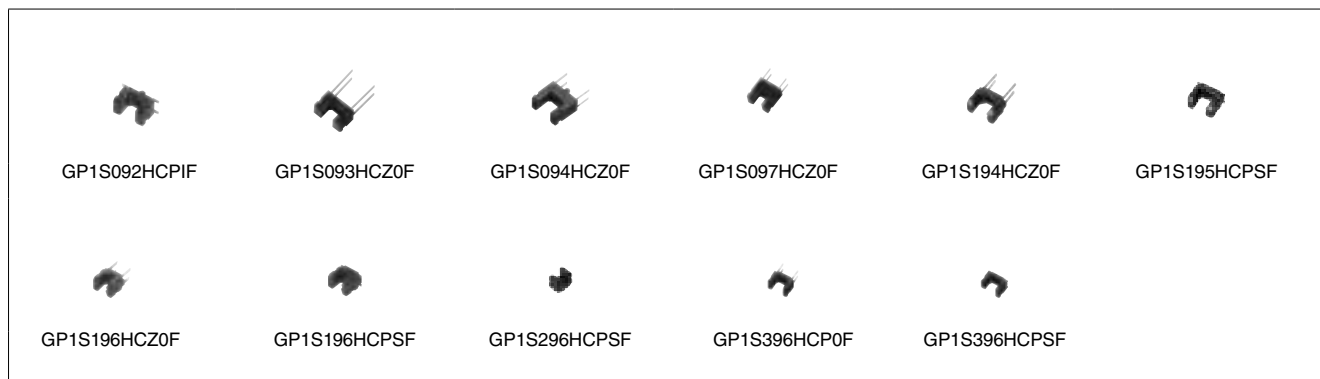

### Notice

In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc.

Except where specially indicated, models listed on this page comply with the EU RoHS Directive\*. For details, please contact SHARP. \*EU RoHS Directive: EU legislation restricting the use of lead, cadmium, hexavalent chromium, mercury, specific brominated flame retardants (PBB and PBDE), and phthalates (DEHP, BBP, DBP, DIBP).

Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.




### <Case type>

(Ta = 25°C)

Model No.	Internal connection diagram	Features	Detecting and emitting gap (mm)	Slit width (mm)	Electro-optical characteristics						
					Current transfer ratio			Response time			
					CTR (%) MIN.	IF (mA)	VCE (V)	tr (μs) TYP.	IC (mA)	RL (Ω)	VCE (V)
GP1S50J0000F▲		High resolution, both-side mounting type	3.0	0.5	2.5	20	5	3	2	100	2
GP1S51VJ000F▲		High resolution, side mounting type	3.0	0.5	2.5	20	5	3	2	100	2
GP1S52VJ000F▲		High resolution, PWB mounting type	3.0	0.5	2.5	20	5	3	2	100	2
GP1S53VJ000F▲		High resolution, PWB mounting type	5.0	0.5	2.5	20	5	3	2	100	2
GP1S58VJ000F▲		High resolution, with positioning pin, PWB mounting type	5.0	0.5	2.5	20	5	3	2	100	2

Note: Topr: -25 to +85°C

The model marked with ▲ may not be available in the near future. Contact with SHARP for details before use.

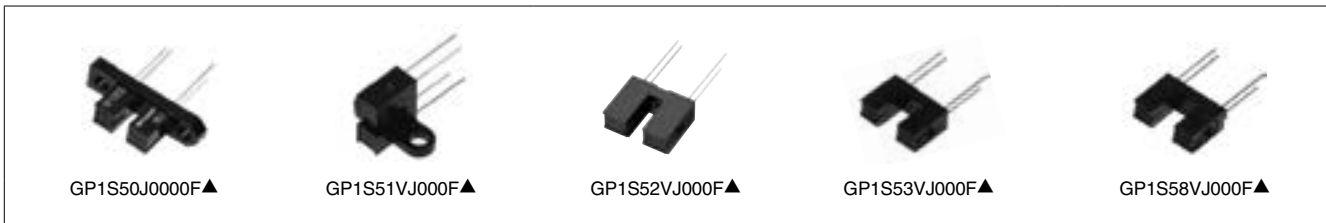


### <With connector>

(Ta = 25°C)

Model No.	Internal connection diagram	Features	Detecting and emitting gap (mm)	Slit width (mm)	Electro-optical characteristics						
					Current transfer ratio			Response time			
					CTR (%) MIN.	IF (mA)	VCE (V)	tr (μs) TYP.	IC (mA)	RL (Ω)	VCE (V)
GP1S173LCS2F		Snap-in mounting integrated connector type Applicable to 3 kinds of thickness of mounting boards	5.0	0.5	2.5	20	5	3	2	100	2
GP1S273LCS1F		Snap-in mounting integrated connector type Applicable to 3 kinds of thickness of mounting boards Compact (Compatible with 1.5 mm pitch connector)	5.0	0.7	2.5	20	5	3	2	100	2

Note: Topr: -30 to +95°C

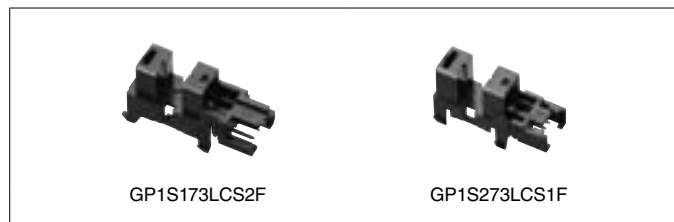

**Notice**

In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc.  
 Except where specially indicated, models listed on this page comply with the EU RoHS Directive\*. For details, please contact SHARP.  
 \*EU RoHS Directive: EU legislation restricting the use of lead, cadmium, hexavalent chromium, mercury, specific brominated flame retardants (PBB and PBDE), and phthalates (DEHP, BBP, DBP, DIBP).  
 Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.



◆**OPIC Type** ( "OPIC" (Optical IC) is a trademark of SHARP Corporation. An OPIC consists of a light-detecting element and signal-processing circuit integrated onto a single chip. )  
**<Case type>**

(Ta = 25°C)

Model No.	Internal connection diagram	Features	Detecting and emitting gap (mm)	Slit width (mm)	Electro-optical characteristics							
					Threshold input current			Propagation delay time				
					IFLH (mA) MAX.	IFHL (mA) MAX.	VCC (V)	tPLH (μs) TYP.	tPHL (μs) TYP.	IF (mA)	RL (Ω)	VCC (V)
GP1A50HRJ00F▲	<p>(When light is cut off: low level)</p>	Both-side mounting, with screw hole	3.0	0.5	5	–	5	3	5	5	280	5
GP1A51HRJ00F		Side mounting, with screw hole	3.0	0.5	5	–	5	3	5	5	280	5
GP1A52HRJ00F▲		PWB mounting type	3.0	0.5	5	–	5	3	5	5	280	5
GP1A53HRJ00F▲		PWB mounting type	5.0	0.5	8	–	5	3	5	8	280	5
GP1A57HRJ00F		PWB mounting type, with positioning pin	10.0	1.8	7	–	5	3	5	7	280	5
GP1A58HRJ00F▲		PWB mounting type, with positioning pin	5.0	0.5	8	–	5	3	5	8	280	5
GP1A52LRJ00F▲	<p>(When light is cut off: high level)</p>	PWB mounting type	3.0	0.5	–	5	5	5	3	5	280	5

Note: Topr = –25 to +85°C  
 The model marked with ▲ may not be available in the near future. Contact with SHARP for details before use.



**Notice**  
 In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc.  
 Except where specially indicated, models listed on this page comply with the EU RoHS Directive\*. For details, please contact SHARP.  
 \*EU RoHS Directive: EU legislation restricting the use of lead, cadmium, hexavalent chromium, mercury, specific brominated flame retardants (PBB and PBDE), and phthalates (DEHP, BBP, DBP, DIBP).  
 Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.



◆**OPIC Type** (“OPIC” (Optical IC) is a trademark of SHARP Corporation. An OPIC consists of a light-detecting element and signal-processing circuit integrated onto a single chip.)

<With 3-pin connector terminal>

(Ta = 25°C)

Model No.	Internal connection diagram	Features	Detecting and emitting gap (mm)	Slit width (mm)	Electro-optical characteristics					
					Supply voltage V <sub>CC</sub> (V)		V <sub>OL</sub> (V) MAX.	Low level output voltage		
					MIN.	MAX.		Light cut-off	I <sub>oL</sub> (mA)	V <sub>CC</sub> (V)
GP1A173LCS5F		Snap-in mounting integrated connector type <sup>*1</sup> 3.3 V / 5 V operation enforced electrostatic discharge (ESD) increased power line noise tolerance	5.0	0.5	3.0	5.5	0.35	No	4	3.3 5.0

Note: Topr: -30 to +95°C

\*1 Applicable to 3 kinds of thickness of mounting boards.



## ■ Photointerrupters

<Reflective type>

◆**Single Phototransistor Output**

<Compact>

(Ta = 25°C)

Model No.	Internal connection diagram	Features	Optimum detecting distance (mm)	Electro-optical characteristics							
				Current transfer ratio			Response time				
				CTR (%) MIN.	I <sub>F</sub> (mA)	V <sub>CE</sub> (V)	tr (μs) TYP.	I <sub>C</sub> (mA)	R <sub>L</sub> (kΩ)	V <sub>CE</sub> (V)	
GP2S700HCP		Compact (4 × 3 × 2 [height] mm), long focal distance, surface mounting leadless type	4	1.5	4	2	20	0.1	1	2	
GP2S60		Thin (3.2 × 1.7 × 1.1 [height] mm), surface mounting leadless type	1	1.0	4	2	20	0.1	1	2	

Note: Topr: -25 to +85°C



**Notice**

In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc.

Except where specially indicated, models listed on this page comply with the EU RoHS Directive\*. For details, please contact SHARP.

\*EU RoHS Directive: EU legislation restricting the use of lead, cadmium, hexavalent chromium, mercury, specific brominated flame retardants (PBB and PBDE), and phthalates (DEHP, BBP, DBP, DIBP).

Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.

◆OPIC Output ( "OPIC" (Optical IC) is a trademark of SHARP Corporation. An OPIC consists of a light-detecting element and signal-processing circuit integrated onto a single chip. )

<With 3-pin connector terminal>

(Ta = 25°C)

Model No.	Internal connection diagram	Features	Optimum detecting distance (mm)	Electro-optical characteristics					
				Supply voltage V <sub>CC</sub> (V)		Dissipation current I <sub>CC</sub> (mA) MAX.	Low level output voltage		
				MIN.	MAX.		V <sub>CC</sub> (V)	V <sub>OL</sub> (V) MAX.	V <sub>CC</sub> (V)
GP2A200LCS0F	(Following diagram [A])	Multiple types of paper detectable, light modulation type, with connector, sensitivity adjusted	5 to 15	4.75	5.25	30 <sup>*1</sup>	5	0.4	5
GP2A240LCS0F		Applicable to inverter fluorescent lamp, light modulation type, with connector, sensitivity adjusted	5 to 15	4.75	5.25	30 <sup>*1</sup>	5	0.4	5
GP2A250LCS0F		Static electricity resistant, applicable to inverter fluorescent lamp, light modulation type, with connector, sensitivity adjusted	2.5 to 12.5	4.75	5.25	30 <sup>*1</sup>	5	0.4	5
☆GP2A451LCS0F	(Following diagram [D])	Compact, screw-clamp type, Applicable to inverter fluorescent lamp, Light modulation type, with connector, 3.3 to 5.0V Operation	2.5 to 12.5	3.0	5.50	10 <sup>*1</sup>	3.3 to 5	0.4	3.3 to 5
GP2A25J0000F	(Following diagram [A])	Multiple types of paper detectable, light modulation type, with connector, sensitivity adjusted	3 to 7	4.75	5.25	30 <sup>*1</sup>	5	0.4	5
GP2A230LRS0F	(Following diagram [B])	Compact, screw-clamp type, multiple types of paper detectable, light modulation type, with connector	3 to 7	4.75	5.25	20 <sup>*1</sup>	5	0.4	5
GP2A230LRS0F		Compact, hook type, multiple types of paper detectable, light modulation type, with connector							
GP2A430LCS0F	(Following diagram [C])	Compact, screw-clamp type, multiple types of paper detectable, light modulation type, with connector, 3.3 to 5V Operation, Low power consumption	3 to 7	3.0	5.5	10 <sup>*1</sup>	3.3 to 5	0.4	3.3 to 5
GP2A430LCSAF		Compact, hook type, multiple types of paper detectable, light modulation type, with connector, 3.3 to 5V Operation, Low power consumption							
☆GP2A431LCSAF		Compact, hook type, multiple types of paper detectable, light modulation type, with connector, 3.3 to 5V Operation, Low power consumption							
GP2A25NJJ00F	(Following diagram [A])	Multiple types of paper detectable, light modulation type, sensitivity adjusted, improved light-resistance characteristic for inverter lighting, built-in visible light cut filter	3 to 7	4.75	5.25	30 <sup>*1</sup>	5	0.4	5
GP2A25DJ000F		Multiple types of paper detectable, light modulation type, with connector, sensitivity adjusted	3 to 7	4.75	5.25	30 <sup>*1</sup>	5	0.4	5
GP2A28AJ000F		Multiple types of paper detectable, light modulation type, with connector, sensitivity adjusted, hook type	3 to 7	4.75	5.25	30 <sup>*1</sup>	5	0.4	5



Note: Topr: -10 to +60°C (GP2A25J0000F, etc.)

-10 to +70°C (GP2A200LCS0F, GP2A240LCS0F, GP2A250LCS0F, GP2A230LRS0F, GP2A230LRS0F, GP2A430LCS0F, GP2A430LCSAF, GP2A431LCSAF)

-10 to +85°C (GP2A451LCS0F)

\*1 Smoothing value R<sub>L</sub> = ∞

[Internal connection diagram]

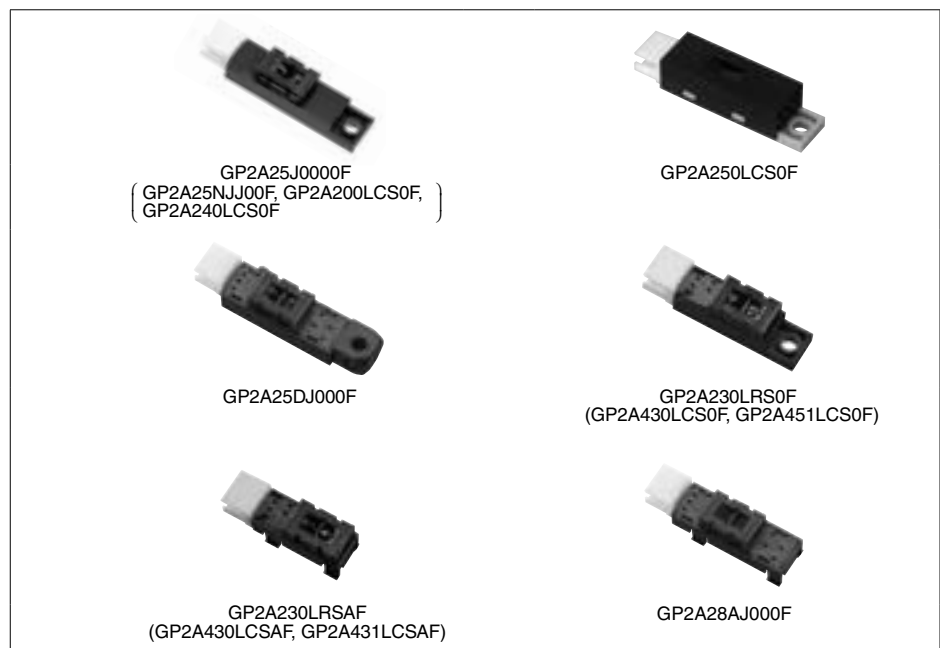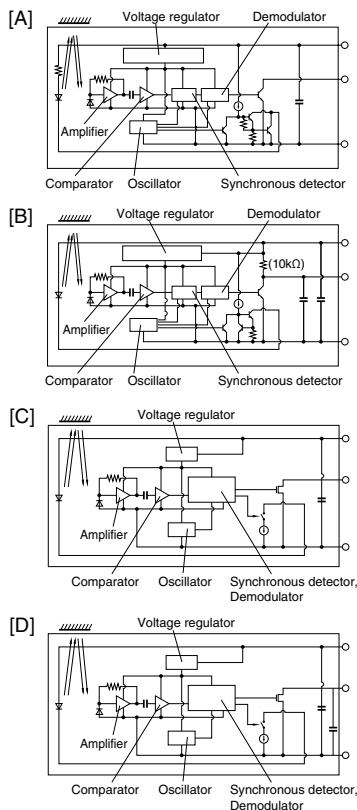

**Notice**

In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc.  
 Except where specially indicated, models listed on this page comply with the EU RoHS Directive\*. For details, please contact SHARP.  
 \*EU RoHS Directive: EU legislation restricting the use of lead, cadmium, hexavalent chromium, mercury, specific brominated flame retardants (PBB and PBDE), and phthalates (DEHP, BBP, DBP, DIBP).  
 Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.