


(Dimensional Drawings)


(unit: mm)

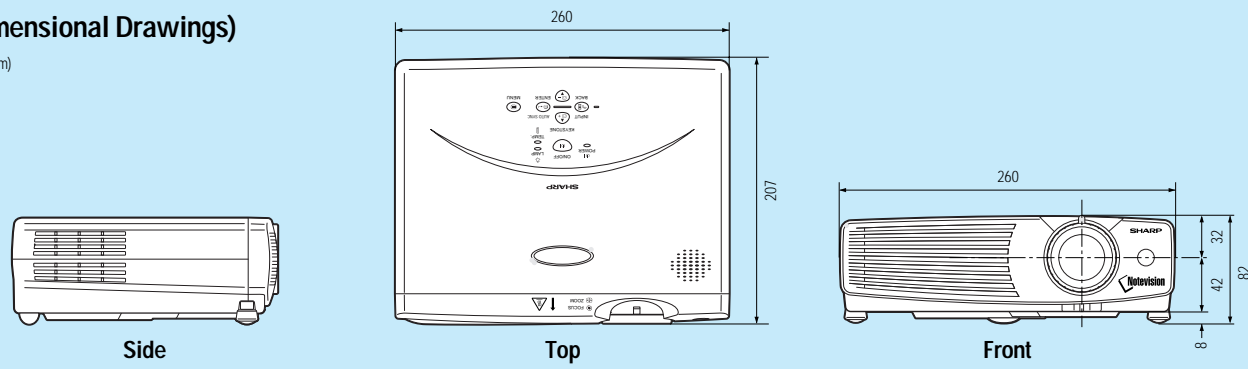


The Power of Mobility and Performance Making Great Business Impressions

Optional Accessories


Cables

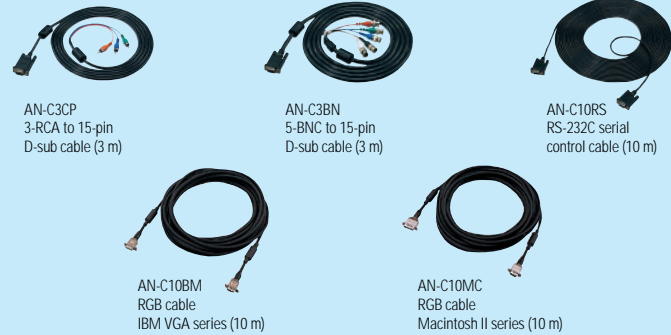

Ceiling Mounts



Installation Adaptors



Specifications

Model	PG-C20X
LCD panels	Poly Silicon 0.9" (2.3 cm) active matrix TFT LCD x 3
Number of pixels	2,359,296 pixels (786,432 dots x 3, in stripe pixel arrangement)
Resolution	580 TV lines (video input)
Computer RGB input signals	SXGA/Mac 21" (in intelligent compression), XGA/SVGA/VGA/VESA, Mac 19"/16"/13" 15-80 kHz (horizontal), 43-85 Hz (vertical), 12-108 MHz (pixel clock) (plug & play VESA; DDC 1/2B)
Video colour systems	NTSC/NTSC 4.43/PAL/PAL (60Hz)/PAL-M/PAL-N/SECAM
Lens	1:1.2 manual zoom and focus
Projection size	40" (102 cm) to 250" (635 cm) diagonal
Projection distance	40" (102 cm): 1.6 m-1.9 m, 100" (254 cm): 3.9 m-4.8 m, 250" (635 cm): 9.9 m -10.0 m
Luminance	1000 ANSI Lumen (800 ANSI Lumen with Power Save Mode ON)
Contrast ratio	500:1
Audio amplifier	1W
Speakers	2.8 cm (round) x 1 (mono)
Input terminals	Video x 1 (RCA), S-video x 1, audio L/R mono mixing x 1 (RCA), computer RGB/component x 1 (15-pin mini D-sub), audio L/R x 1 (3.5mm stereo mini jack x 1), RS-232C serial port x 1 (9-pin D-sub)
Output terminals	Computer RGB x 1 (15-pin mini D-sub), audio L/R x 1 (3.5 mm stereo mini jack)
Power source	100-240V AC, 50/60Hz (Multi-Voltage)
Power consumption	230W (standby 5W)
Projection lamp	150W NSH (1000 hour lamp life)
Dimensions (W x H x D)	260 x 74 x 207 mm (main body only) 260 x 82 x 207 mm (including adjuster legs)
Weight	2.6 kg
Supplied accessories	Remote control, two AAA size batteries, power cord (1.8/3.6 m), computer cable (3 m), computer audio cable (3 m), remote mouse receiver and cable for IBM/Mac USB (1 m), IBM PS./2 (1 m), DIN to D-sub RS-232C cable (15 cm), extra air filter, lens cap (attached), lens cap strap, CD-ROM, operation manuals

Design and specifications are current as of March 2001, but are subject to change without notice.

