

Quick Setup and Start! With the PG-A20X or PG-A10X/A10S, Anybody Can

The PG-A20X & PG-A10X/S simplify basic features for exact operation for anybody rather inexperienced with presentations. They provide speedy preparation, simple and smooth operation, a file-size compact and lightweight body, high-brightness, a long-life lamp and low noise design, creating a comfortable presentation environment and rendering successful business results. Now that anyone can give an impressive presentation with the PG-A20X or PG-A10X/A10S, companies will surely wish to assign one to each division and department.

Essential Elements of Mobile Presentation

4500-Hour Longer Lamp Life

Employing Low Power Shutdown (LPS) and a newly designed lamp with reduced impurity in materials and increased purity achieves a long lamp life of 4500 hours in Eco mode (3000 hours in Standard mode). The lamp can provide superior performance for as long as 4 years and 3 months when used 4 hours per day, 5 days a week.

Long-Life Lamp: Reduction in glass transparency caused by impurity in lamp materials combined with inferiority of electrodes together decrease lamp brightness. This is the main reason lamp life is restricted. In the PG-A20X/A10X/A10S, impurity of lamp materials is reduced, increasing lamp life.

LPS (Low Power Shutdown): This technology reduces damage to the lamp electrodes by maintaining low power mode when the lamp is turned off. When switching into the low power mode, the glass cools more quickly than the electrodes and prevents excess enclosure material from adhering to the electrodes, which causes resistance when turning the lamp on. The result is improved lighting the next time the lamp is turned on and preventing high-voltage being applied to the electrodes when the lamp is off.

Lamp Life: This is the average time for the lamp's luminance to decrease to half and is not a guarantee of time.

2000/1600 ANSI Lumen Brightness (PG-A20X)

1500/1200 ANSI Lumen Brightness (PG-A10S)

1300/1040 ANSI Lumen Brightness (PG-A10X)

Incorporating Sharp optoelectronics technology, these projectors provide much brighter pictures (2000, 1500 and 1300 ANSI lumen for the PG-A20X, A10S and A10X, respectively) even from a compact body in Standard mode. Plus, they can be set differently in Eco mode (1600, 1200 and 1040 ANSI lumen for the PG-A20X, A10S, and A10X, respectively) according to room lighting conditions and presentation purposes.

Compact-to-Carry File-Size Body

PG-A20X/A10X/A10S boasts a compact, file-size design (29.7 x 22.9 x 8.1 cm) with a lightweight body (2.9 kg), accompanying you with your PC to provide presentations anywhere.



Smooth Presentations Even for Beginners

Intuitive Layout of Buttons and Terminal Layout

For intuitive button layout, essential and frequently used buttons for basic operations, setup and image adjustment are located close together. This layout allows simple setup and operation for anybody. And, a wide variety of AV/PC terminals are effectively placed with colour guidance.




Rear Terminal

Page Up/Down Buttons on Remote Control

With the optional remote receiver AN-MR1EL, screens displaying presentation software such as PowerPoint® can be easily moved forward and back by remote control.

Quick Guide


Any person first using the PG-A20X/A10X/A10S can quickly set up and use it with just a quick glance at the reference sticker enclosed. Sticking it close to operation buttons simplifies basic operation by eliminating the need to check operation manuals.

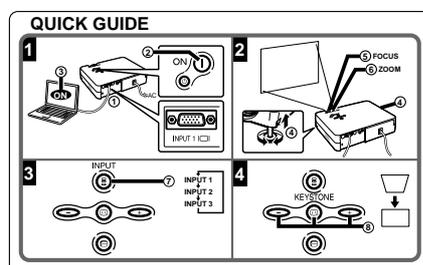


Presentation Support from Setup Flex

Short Throw Lens

The Short Throw Lens makes large-screen presentation possible even in a small meeting room.

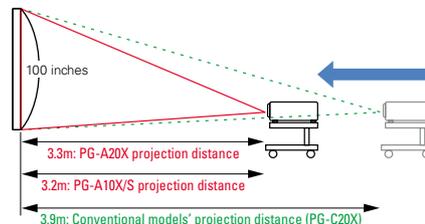

Correlation of PG-A20X/A10X/A10S and Screen

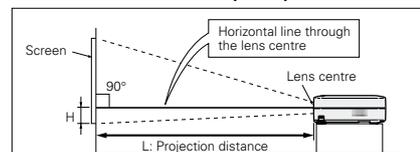

4:3 Zoom Mode (Standard mode with computer input) (PG-A20X)

Diagonal (inches)	Picture size			L: Projection distance		H: Distance between bottom of the picture and the lens centre
	Width (m)	Height (m)	Shortest	Longest		
300	6.1	4.6	10.0m	11.9m	44.4cm	
250	5.1	3.8	8.3m	9.9m	37.0cm	
200	4.1	3.1	6.6m	7.9m	29.6cm	
150	3.1	2.3	5.0m	5.9m	22.2cm	
100	2.0	1.5	3.3m	3.9m	14.8cm	
84	1.7	1.3	2.7m	3.3m	12.4cm	
72	1.5	1.1	2.3m	2.8m	10.7cm	
60	1.2	0.9	1.9m	2.3m	8.9cm	
40	0.8	0.6	1.3m	1.5m	5.9cm	

4:3 Zoom Mode (Standard mode with computer input) (PG-A10X/S)

Diagonal (inches)	Picture size			L: Projection distance		H: Distance between bottom of the picture and the lens centre
	Width (m)	Height (m)	Shortest	Longest		
300	6.1	4.6	9.8m	11.8m	46.2cm	
250	5.1	3.8	8.2m	9.8m	38.5cm	
200	4.1	3.1	6.5m	7.9m	30.8cm	
150	3.1	2.3	4.9m	5.9m	23.1cm	
100	2.0	1.5	3.2m	3.9m	15.4cm	
84	1.7	1.3	2.7m	3.3m	12.9cm	
72	1.5	1.1	2.3m	2.8m	11.1cm	
60	1.2	0.9	1.9m	2.3m	9.2cm	
40	0.8	0.6	1.3m	1.5m	6.2cm	



Be Ready Anytime to Give a Perfect Presentation Anywhere on the Road.

Stability and Convenient Operation

31 dB/33 dB Low Fan Noise (in Eco Mode) and Front Ventilation

The projector employs an Eco mode and a newly developed separate cooling system for reducing fan noise (31 dB for the PG-A10X/S and 33 dB for the PG-A20X in Eco mode). Plus, Front Ventilation produces a comfortable presentation environment without the disturbance of air being blown back toward the presenter.



Wide Angle Adjustment

The angle of the front adjuster is a full 12° (5° for conventional models) and a 3° rear adjuster is added. This enables wide, free, and flexible angle adjustment for projection placement. The projector can also be mounted on ceilings with projection flipped left/right or up/down.



Automatic Keystone Correction*

The PG-A20X detects inclination of the upper and lower sides of the projector and automatically corrects trapezoidal distortion of the image projected on the screen, making it much easier and quicker to set up the projector and start your presentation.

* PG-A20X only.

Simple Key Lock and Anti-Theft Function

The key lock and cancel are easily controlled with a key button on the projector body and the remote control. These functions are useful for example to prevent children from meddling, or any other time to avoid tampering.

Excellent PC Compatibility

Excellent Compatibility with a Wide Range of Computer Input Signals

The PG-A20X/A10X is truly compatible with XGA (1,024 x 768). In addition, SXGA+ (1,400 x 1,050) and SXGA (1,280 x 1,024) are also compatible in intelligent compression*¹ for natural, smooth and clear PC display projection. For the PG-A10S, SVGA is truly compatible and SXGA+ (1,400 x 1,050) and SXGA (1,280 x 1,024) are also compatible in intelligent compression.*¹

- Horizontal Frequency: 15-70 kHz
- Vertical Frequency: 43-85 Hz
- Pixel Clock: 12-108 MHz

sRGB Compatibility

sRGB Compatibility, the international standard for colour reproductivity, faithfully reproduces on PC displays the colour tones, phases, and gradations of the original pictures.

Auto Response Adjust (ARA)

One touch automatically synchronises subtly different projection signals from connected PCs.

Superior Video Image Quality

Big-Screen Projection of DVD*² Software

With the merging of advanced technology from theatre projectors and high-grade television, the PG-A20X & PG-A10X/S provide high-quality pictures for DVDs, Hi-vision broadcasts and education videos in large-screen projection. The projector is also compatible with worldwide broadcast signals such as NTSC, PAL and SECAM.

Other Outstanding Features

■ Sharp Original Pull-Down Menu GUI (Graphical User Interface)


The easy-to-use icon-based GUI shows how to adjust the picture, language or other settings on the screen, and single adjustment items can be displayed without disturbing the screen with menu bars.

■ Built-In 1 W Speaker

■ Enlarge & Freeze

■ Picture Setting Memory

■ Dimensional Drawings

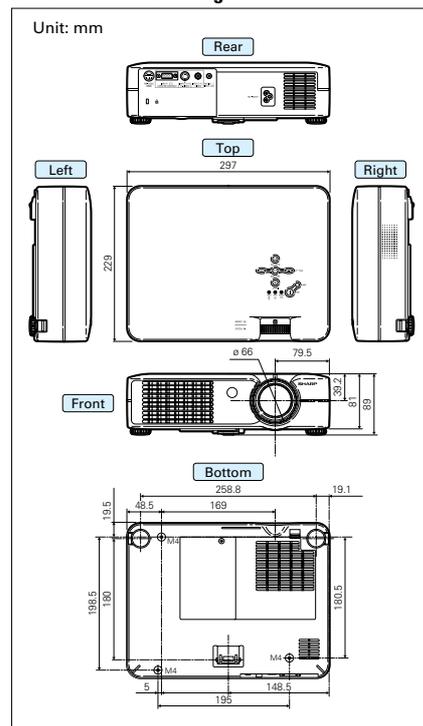

*¹ True SXGA, SXGA+ and UXGA pictures cannot be displayed.
*² A separate DVD player is needed for viewing DVDs.

