


PG-F320W



Dimensions

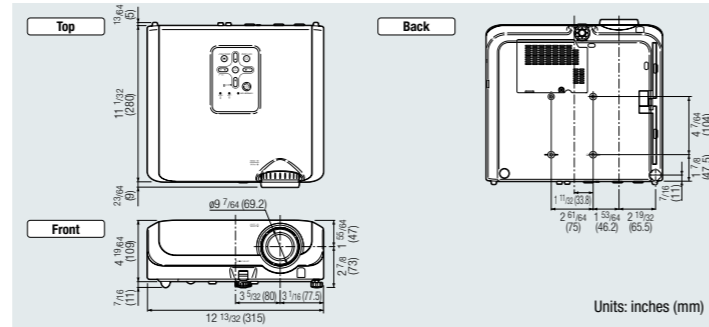

SHARP

PG-F320W
True WXGA Data Projector

Optional Accessories

Lamp	USB Remote Receiver	Cable	Ceiling Mounts		
AN-F310LP	AN-MR2	AN-C3CP2 3 RCA to mini D-sub 15 pin cable (10' (3 m))	AN-TK201 For high ceiling installation	AN-TK202 For standard ceiling installation	AN-60KT Installation adaptor

Note: Some of the optional accessories may not be available depending on the region. Please check with your nearest Sharp Authorized Projector Dealer or Service Center.

Specifications

Model	PG-F320W	
Display device	0.65" DLP® chip x 1	
Resolution	WXGA (1,280 x 800)	
Brightness	3,000 ANSI lumens	
Contrast ratio	2,000:1	
Lens	F number	F2.4-2.6
	Zoom	Manual, x1.15 (f=18.7 – 21.5 mm)
	Focus	Manual
Input signals	DTV	1080P / 1080i / 720P / 576P / 576i / 540P / 480P / 480i NTSC / PAL / SECAM
	Computer RGB	LXGA**2 / SXGA**1 / SXGA**1 / WXGA / XGA / SVGA / VGA Mac 21**1 / 19" / 16" / 13"
Input terminals	DVI-I (Compatible with HDCP)	x1
	Computer / Component (mini D-sub 15 pin)	x1
	S-Video (mini DIN 4pin)	x1
	Video (RCA)	x1
	Audio (ø3.5 mm stereo minijack)	x1
	Audio (RCA)	x2 (L/R)
Output terminals	Computer / Component (mini D-sub 15 pin)	x1
	Audio (ø3.5 mm stereo minijack)	x1 (variable audio output)
Control and communication terminals	LAN (RJ-45)	x1
	USB (Type B)	x1
	RS-232C (mini DIN 9 pin)	x1
Horizontal frequency	15 – 110 kHz	
Vertical frequency	45 – 85 Hz	
Speaker	2 W (mono)	
Fan noise	35 dB (Bright), 30 dB (Eco+Quiet)	
Projection lamp	275 W	
Lamp life	3,000 hours (Eco+Quiet)	
On-screen display languages	English, German, Spanish, Dutch, French, Italian, Swedish, Portuguese, Simplified Chinese, Korean, Japanese, Russian, Arabic, Polish, Turkish	
Rated voltage	AC 100-240 V	
Rated frequency	50/60 Hz	
Input current	3.7 A	
Power consumption (standby)	363 W (10.5 W) with AC 100 V, 349 W (11.0 W) with AC 240 V	
Operation temperature	41°F to 95°F (+5°C to +35°C)	
Dimensions (main body only) W x H x D	12 13/32" x 4 19/64" x 11 1/32" (315 x 109 x 280 mm)	
Weight (approx.)	9.1 lbs. (4.1 kg)	
Supplied accessories	Remote control, two R-6 batteries, power cord (6' (1.8 m)), RGB cable (10' (3.0 m)), lens cap (attached), DIN-D-sub RS-232C adaptor (5 5/16" (15 cm)), storage case, operation manual, CD-ROM	

Design and specifications are current as of November 2007, but are subject to change without notice.

- *1 Compatible in intelligent compression *2 Analogue RGB signal only
- DLP® and the DLP logo are registered trademarks of Texas Instruments and BrilliantColor™ is a trademark of Texas Instruments.
- All company and/or product names are trademarks and/or registered trademarks of their respective manufacturers. Sharp makes no warranties or representations of any kind with respect to these products.
- The lamp life may vary depending on the usage condition.



New WXGA-Compatible Projector with BrilliantColor™ Technology, Networking and a Variety of Functions Applicable with Wide-Aspect Media, Providing High-Quality Performance

SHARP
SHARP CORPORATION OSAKA, JAPAN
URL <http://www.sharp-world.com/>

© SHARP CORP. (NOV. 2007 PRINT) | E



