


XG-P10X



PG-C30X



Optional Accessories

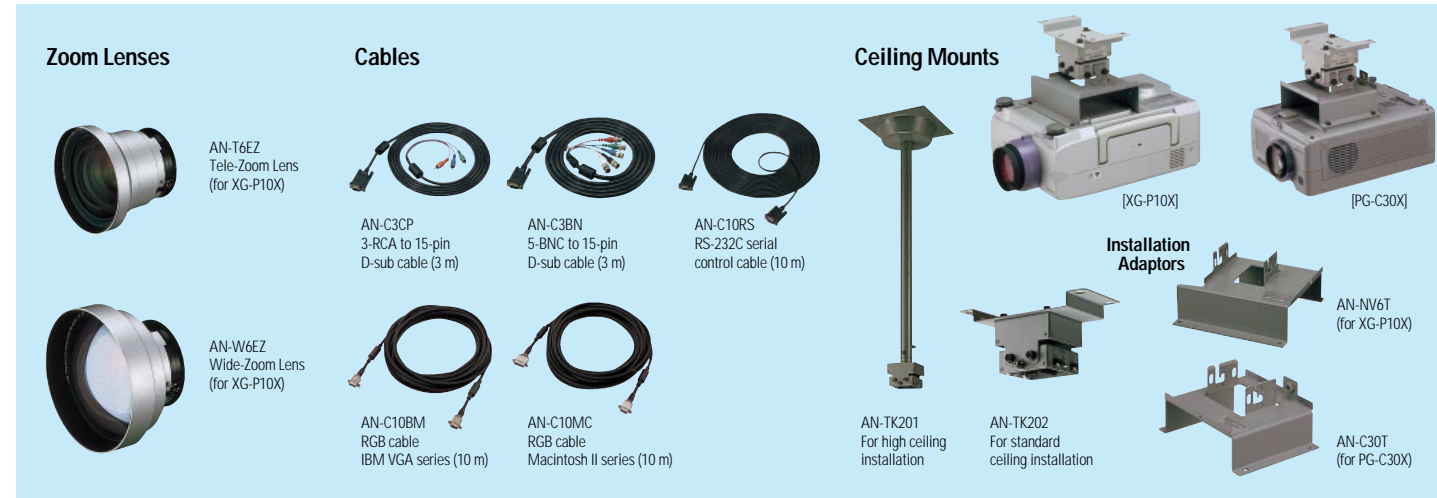

Specifications

Model	XG-P10X	PG-C30X
LCD panels	Poly Silicon 1.3" (3.3 cm) active matrix TFT LCD x 3	Poly Silicon 0.9" (2.3 cm) active matrix TFT LCD x 3
Number of pixels	2,359,296 pixels (786,432 dots x 3, in stripe pixel arrangement)	
Resolution	560 TV lines (video input), 750 TV lines (DTV 720P input, Dot by Dot)	
Computer RGB input signals	UXGA/SXGA/Mac 21" (in advanced intelligent compression), XGA/SVGA/VGA/VESA, Mac 19"/16"/13" 15-126 kHz (horizontal), 43-200 Hz (vertical), 12-230 MHz (pixel clock) (plug & play VESA: DDC 1/2B)	
Video colour systems	NTSC/NTSC 4.43/PAL/PAL (60Hz)/SECAM/DTV (480i/480P/720P/1080i)	
Lens	1:1.3 power zoom and focus	1:1.3 manual zoom and focus
Projection size	40" (102 cm) to 300" (762 cm) diagonal	
Projection distance	40" (102 cm) : 1.4 m-1.9 m, 100" (254 cm) : 3.7 m-4.9 m, 300" (762 cm) : 11 m -14.3 m	40" (102 cm) : 1.4 m-1.9 m, 100" (254 cm) : 3.6 m-4.7 m, 300" (762 cm) : 10.8 m -14.0 m
Luminance	3000 ANSI Lumen	1700 ANSI Lumen
Contrast ratio	350:1	250:1
Audio amplifier	2W + 2W (stereo)	2W
Speakers	5 cm (round) x 2	8 cm (round) x 1
Input terminals	Video x 1 (RCA), S-video x 1, audio L/R stereo x 1 (RCA), computer RGB x 2 (15-pin mini D-sub x 2, 5BNC x 1), audio L/R x 2 (3.5mm stereo mini jack), component x 1 (BNC), RS-232C serial port x 1 (9-pin DIN), wired remote control x 1 (3.5 mm stereo mini jack)	Video x 1 (RCA), S-video x 1, audio L/R mono mixing x 1 (RCA), computer RGB x 2 (15-pin mini D-sub), audio L/R x 1 (3.5mm stereo mini jack), RS-232C serial port x 1 (9-pin D-sub)
Output terminals	Computer RGB x 1 (15-pin mini D-sup), audio L/R x 1 (3.5 mm stereo mini jack)	
Power source	110-120/220-240V AC, 50/60Hz (Multi-Voltage)	
Power consumption	300W (standby 4W)	
Projection lamp	200W UHP	DC 200W
Dimensions (W x H x D)	261 x 139 x 356 mm (main body only) 261 x 156 x 411.5 mm (including an adjuster leg)	229 x 121 x 310 mm (main body only) 243.5 x 134 x 355.4 mm (including an adjuster leg)
Weight	7.3 kg	4.8 kg
Supplied accessories	Remote control, two AA size batteries, power cord (1.8 m), computer cable (3 m), computer audio cable (3 m), three BNC-RCA adaptors, remote mouse receiver and cable for IBM/Mac USB (1 m) and IBM PS/2 (1 m), DIN to D-sub RS-232C cable (15 cm), extra air filter, lens cap (attached), CD-ROM, operation manuals	Remote control, two AA size batteries, power cord (1.8 m), computer cable (3 m), computer audio cable (3 m), remote mouse receiver and cable for IBM/Mac USB (1 m) and IBM PS/2 (1 m), DIN to D-sub RS-232C cable (15 cm), extra air filter, lens cap (attached), CD-ROM, operation manuals

Design and specifications are current as of September 2000, but are subject to change without notice.
 * Max. of 10 projectors can be controlled through RS-232C from a PC in which Sharp Advanced Presentation Software Professional Edition is installed.
 Sharp Advanced Presentation Software Professional Edition can be down-loaded from the Sharp Global Home Page (<http://www.sharp-world.com/projector>) for free.

SHARP

XG-P10X
PG-C30X



Sharp Conference & Portable LCD Projectors
— Your Best Business Partners



XG-P10X

PG-C30X

TRUE XGA CONFERENCE/PORTABLE LCD PROJECTORS

SHARP

SHARP CORPORATION OSAKA, JAPAN
URL: <http://www.sharp-world.com/>